




## 5 Amp Time Delay Midget Fuse for Control Panels

### FEATURES:

- UL listed Fast-Acting Class CC per UL 248 and CSA Certified
- Voltage Rating: AC 600V / DC 250 V

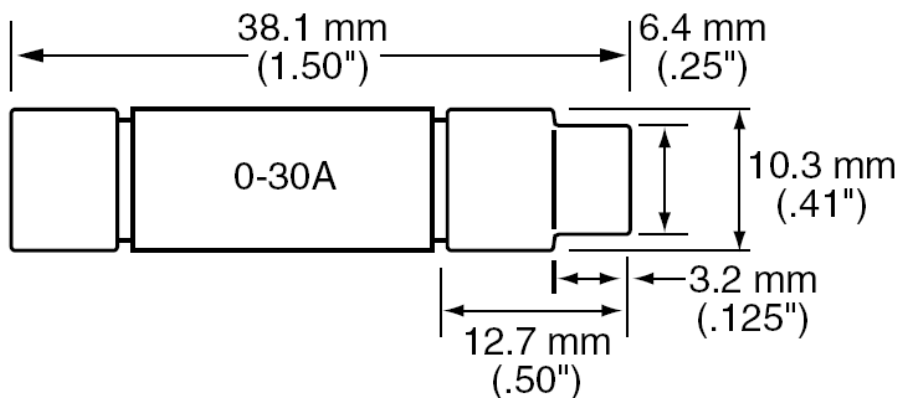

### Electrical Characteristics for Series

% of Ampere Rating	Ampere Rating	Opening Time
110%	0-30A	15 minutes, Minimum
135%	0-30A	1 hour, Maximum
200%	0-30A	4 minutes, Maximum
200% Time-delay		12 seconds, Minimum

### Electrical Specifications by Item – CCMR Series

Amp Code	Amp Rating (A)	Interrupting Rating	Nominal Cold Resistance (Ohms)	Agency Approvals	
				UL	CSA
CCMR 005	5	AC 200,000 ampere DC 20,000 ampere	.07780	x	x