




Glass Fuse for Compactor Control Panels, 1.6 or 2 Amp



FEATURES:

- 5x20mm Fast-acting glass body
- Designed to UL/CSA/ANCE 248 Standard
- RoHS compliant
- Lead Free

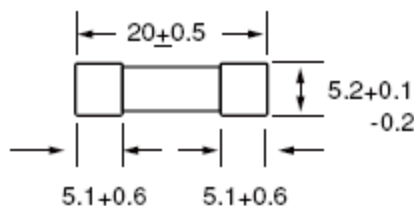

Amp Code	Amp Rating (A)	Voltage Rating (V)	Interrupting Rating	Nominal Cold Resistance (Ohms)	Nominal Melting I^2t (A ² sec)	Agency Approvals				
						CE	UL	SP	PSE	CCC
01.6	1.6	250	100A@250Vac, 10000A@125Vac	0.0758	2.02500	x	x	x	x	x
002.	2	250		0.0603	2.64500	x	x	x	x	x

CHARACTERISTICS:

- Materials: Body – Glass, Cap – Nickel-plated brass, Leads: Tin-plated copper
- Terminal Strength: MIL-STD-202G, Method 211 A, Test Condition A
- Solderability: Reference IEC 60127 Second Edition 2003-01 Annex A
- Product Marking: Cap 1: Brand logo, current and voltage rating
Cap 2: Series and agency approval markings
- Operating Temperature: -55°C to +125°C
- Thermal Shock: MIL-STD-202G, Method 107G, Test Condition B: (5 cycles -65°C + 125°C)
- Vibration: MIL-STD-202G, Method 201A
- Humidity: MIL-STD-202G, Method 103B, Test Condition A high RH (95%) and elevated temperature (40°C) for 240 hours
- Salt Spray: MIL-STD-202G, Method 101D, Test Condition B